

# GLA618



## The GiN AUX+ Distributor


The GLA618 is an active AUX+ distributor with 8 AUX+Out ports for simultaneous connection of multiple extension devices (e.g. GLX504, GLX427, GLX415 und GL5450) to one data logger (e.g. GL5300 series).

Discover our products online!

- › AUX+Outs are secured separately for every additional device
- › Wakeup via extension device is transmitted by the GLA618 to the data logger
- › Separate Status LEDs for all AUX+Outs
- › Multiple extension devices can be connected offset from the data logger via the GLA618

# GLA618

## Technical Specifications

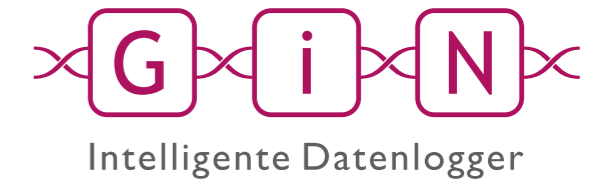

### Technical Data

<b>Interfaces</b>	8 AUX*Out for connecting up to 8 G.i.N. extension devices 1 AUX*In for connecting data logger 1 Mini USB for updating and configuration 1 Relay with fuse with a maximum threshold of 10 A (at 20 V)
<b>Operating Voltage</b>	+7 V ... + 55 V
<b>Power Consumption at 12 V</b>	Typ. 1.4 W
<b>Current Consumption at 12 V</b>	
• in sleep mode	< 1 mA
• in operation mode	115 mA
<b>Operating Temperature Range</b>	-40 °C ... + 80 °C

### Housing

<b>Material</b>	Side Profile: Al Mg3  Cover: EN AW-6060 (AlMgSi0.5) T66  Trim Strip: ABS
<b>Dimensions (LxWxH)</b>	212 x 290 x 43.7 mm
<b>Weight</b>	~ 2100 g

